



ITEM #

Back Bars | Slim Line Glass Door

STANDARD FEATURES

- **HEAVY DUTY CONSTRUCTION**

Top made of solid 18 gauge stainless steel for easy cleaning. Wear resistant black vinyl exterior, and galvanized interior with durable stainless steel floor, and coved corners. Ecomate® insulation foamed in place.

- **DUAL PANE THERMA GLASS in "G" Models**

Black aluminum frame, merchandise your product with greater visibility.

- **ENHANCED REFRIGERATION SYSTEM**

Factory engineered oversized and balanced refrigeration system. CFC free R-13A refrigerators maintain temperature between 33°F to 38°F, keeping beers ice cold.

- **LEFT SIDE MOUNT COMPRESSOR & FRONT BREATHING**

System allows easy service and unrestricted placement for the unit even in narrow spaces.

- **ANALOG THERMOSTAT**

- **STAY OPEN DOORS WITH LOCKS AND LIGHT**

90°F stay open door feature and LED light underneath the mullion.

- **ADJUSTABLE, EPOXY COATED WIRE SHELVES**

- **GREATER USABLE INTERIOR CAPACITY**

Evaporator located on left side above compressor providing greater working interior capacity.

- **24" DEPTH FOR LIMITED SPACE INSTALLS**

- **MAGNETIC GASKET**

Built of one piece, the gaskets are removable without tools for ease of cleaning and replacement.

- EBB-24-48G-B
- EBB-24-60G-B
- EBB-24-72G-B



EBB-24-48G-B



EBB-24-60G-B



EBB-24-72G-B

ACCESSORIES

Additional shelves



Model	Doors	Capacity		Kegs	Shlvs	Amp	HP	Volt	NEMA Plug	Cabinet Dimensions			Shipping (Wt. / Cubes)		
		12 Oz can	12 Oz Bottles							W	D*	H			
GLASS DOOR															
EBB-24-48G-B	2	300	180	2	4	7.4	1/4	115/60/1	5-15P	49 5/8"	24 5/8"	35 1/2"	238	48	
EBB-24-60G-B	2	390	234	3	4	8.4	1/4	115/60/1	5-15P	62 1/4"	24 5/8"	35 1/2"	291	55	
EBB-24-72G-B	3	540	324	3	6	9.2	1/4	115/60/1	5-15P	72"	24 5/8"	35 1/2"	356	77	

* Depth does not include 1" Bumper




PLAN
VIEW

Back Bars Slim Line | Glass Door

EBB-24-48G-B

EBB-24-60G-B

EBB-24-72G-B

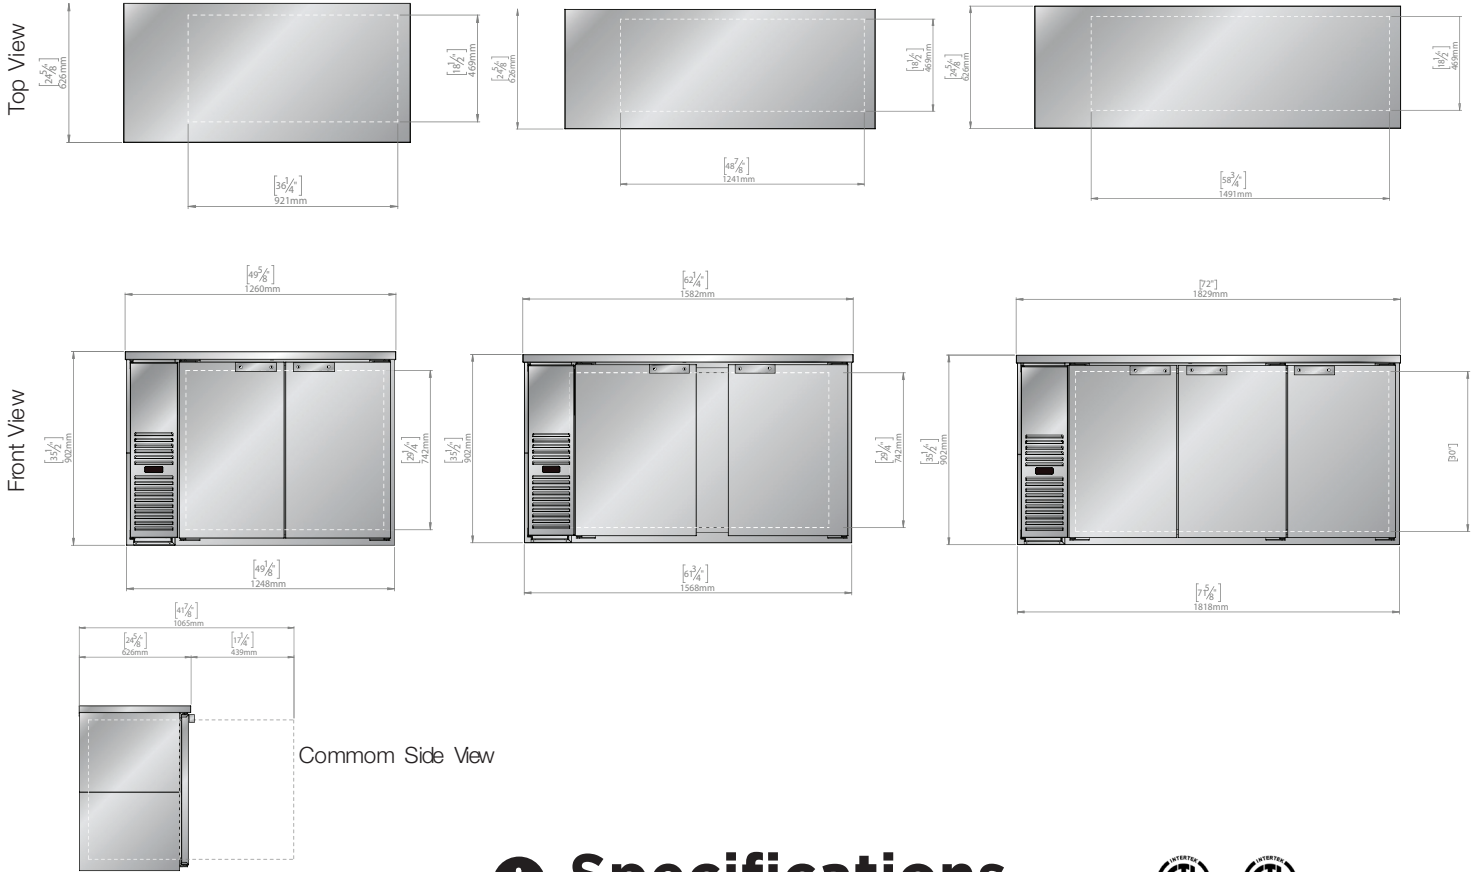

* Specifications



CONSTRUCTION

- Stainless steel 18 gauge top and stylish black vinyl finish front, sides and back. Interior is galvanized steel walls with covered corner stainless steel floor. Interior LED light.
- Then entire cabinet has 1-1/2" CFC-free polyurethane insulation foamed in place.

DOORS & SHELVES

- Doors with 90°F stay open feature, light and locks standard. One piece magnetic gasket for easy cleaning.
- Dual pane glass doors in "G" models with black aluminum frame.
- Adjustable, epoxy coated wire shelves, two per door, standard.

REFRIGERATION SYSTEM

- Oversized and balanced refrigeration system.
- Self-contained capillary tube sustem using enviromentally friendly & CFC-free refrigerant. R-13A holding temperature at 33°F to 38°F.
- Front breathing/side mounted compressor for ease of service and placement in narrow spaces. Condensing unit is behind the front grill, slides out for easy cleaning and maintenance.

- Forced air cooling system for faster cooling and constant temperature in the cabinet.
- Large fan motor and fan blades for better air circulation.
- Self contained system, no plumbing necessary.
- Analog thermostat.

ELECTRICAL

- The whole unit is completely pre-wired at factory with cord and plug set included and ready for final connection to a 115/60/1 phase.

WARRANTY

- Continental USA & Canada:
- One year:** Labor and parts warranty.
 - Five year:** Compressor warranty.
 - International:** One year parts only.