



Reach-Ins

REFRIGERATORS & FREEZERS

STANDARD FEATURES

● DURABLE STAINLESS STEEL

Our reach-ins boasts a sturdy stainless steel exterior and interior finish with a galvanized back panel provides strength and durability.

● ERGONOMICALLY DESIGNED DOORS WITH LOCKS

Standard solid doors come with robust handles and self closing / 90° stay open door feature, working together for customer convenience.

● MAGNETIC DOOR GASKET

One piece magnetic gasket is removable without tools for ease of cleaning and replacement.

DIGITAL SMART CONTROLLER

Digital control and display for a more precise temperature reading. Includes door alarm to protect your food from spoilage, self-diagnosis technology and ECO function to save energy through automatic temperature adjustment.

● HIGH DENSITY POLYURETHANE INSULATION

Ecomate® 2-3/8 Inch CFC-free polyurethane insulation foamed in place for extra strength and energy efficiency. Environmentally friendly with zero ozone depletion potential (ODP) and zero global warming potential (GWP).

● EFFICIENT REFRIGERATION SYSTEM

Factory engineered oversized and balanced refrigeration system. CFC-free R-290 for 1 & 2 door refrigerators and R-404 for 3 door refrigerators and all freezers. Refrigerators maintain temperature from 33°F to 38°F and freezers maintain temperature from 0°F to -8°F. Hot gas evaporator in drain pan for efficient condensate evaporation.

● BOTTOM MOUNT COMPRESSOR

Allows easy access with service friendly rails while adding more storage space above. This system provides a cool and clean operating environment enhancing the compressor life.

● ALL BASIC PAN SIZES ACCEPTED, Including 18" x 26"

● LED LIGHT & SWIVEL CASTERS

Solid door units come with interior LED light and all units have 4" diameter swivel casters with front brakes.

EDRR-23-B and EDRF-23-B have a field reversible door

ACCESSORIES

Additional epoxy coated shelves

- EDRR-23-B □ EDRR-49-B □ EDRR-72-B
- EDRF-23-B □ EDRF-49-B □ EDRF-72-B



EDRR(F)-23-B



EDRR(F)-49-B



EDRR(F)-72-B



ISO 9001

MODEL	DOORS	CAPACITY (Cu.Ft)	SHELVES	AMPS	HP	VOLTAGE	NEMA PLUG	Cord Length	Cabinet Dimensions			Shipping		
									W"	D"	H	Wt. lbs.	Cubes	
REFRIGERATOR														
EDRR-23-B	1	23	3	1.8	1/5	115/60/1	5-15P	8'	27 1/2"	32"	84 2/3"	292	47	
EDRR-49-B	2	49	6	2.8	1/4	115/60/1	5-15P	8'	55 1/2"	32"	84 2/3"	495	93	
EDRR-72-B	3	72	9	11.5	3/4	115/60/1	5-15P	8'	81 7/8"	32"	84 2/3"	675	155	
FREEZER														
EDRF-23-B	1	23	3	8.5	3/4	115/60/1	5-15P	8'	27 1/2"	32"	84 2/3"	315	47	
EDRF-49-B	2	49	6	12.9	1	115/60/1	5-15P	8'	55 1/2"	32"	84 2/3"	495	93	
EDRF-72-B	3	72	9	14.5	1	115/20/1	5-15P	8'	81 7/8"	32"	84 2/3"	675	155	




Reach-Ins REFRIGERATORS & FREEZERS


EDRR(F)-23-B

EDRR(F)-49-B

EDRR(F)-72-B

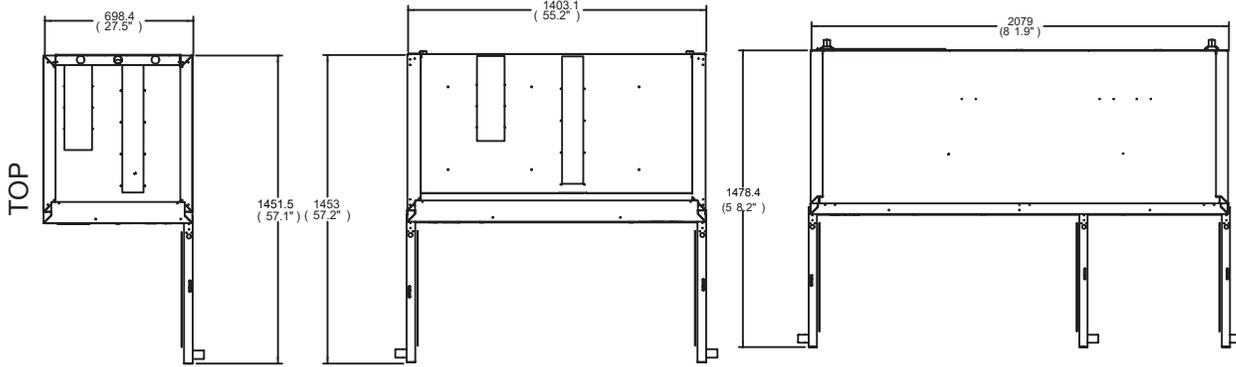

Common Side View

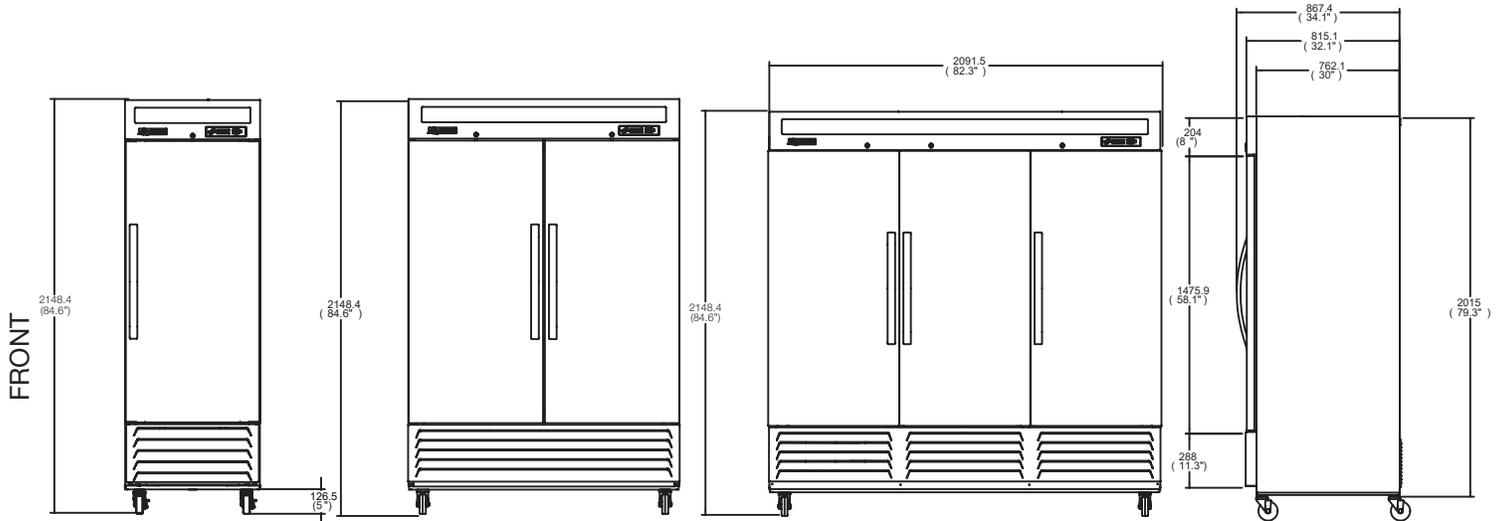

* Specifications



CABINET CONSTRUCTION

- EXTERIOR: Stainless steel, galvanized steel back
- INTERIOR: Stainless steel.
- CABINET & DOOR: Foamed in place high density, Ecomate® FCF-free, polyurethane insulation 2-3/8". Covered corner floor to meet ETL requirements.
- CASTERS: 4" Diameter swivel casters, front brakes.
- SHELVES: 3 Adjustable heavy duty epoxy coated wire shelves per door.

DOORS

- Stainless steel front and interior.
- GASKETS: One piece magnetic gasket is removable without tools for easy cleaning.
- CLOSING SYSTEM: Self-closing doors with 90° stay open feature for convenient loading and unloading.

REFRIGERATION SYSTEM

- Oversized and balanced refrigeration system.
- CFC-free R-290 for 1 & 2 door refrigerators and R-404A for 3 door refrigerators and all freezers.
- Refrigerators hold temperature from 33 °F to 38°F and freezers from -8°F to 0°F.
- Self-contained capillary tube system uses environmentally friendly refrigerant (FCF free).

- Hot gas evaporator in drain pan for efficient condensate evaporation.
- Bottom mount compressor with service friendly rail system.
- ECM Evaporator Fan Motor to increase the efficiency and reduce the energy consumption.
- Self contained system, no plumbing necessary.

ELECTRICAL

- The whole unit is completely pre-wired at factory with cord and plug set included and ready for final connection to a 115/60/1 phase.

WARRANTY

- Continental USA & Canada:
- **One year:** Labor and parts warranty.
 - **Five year:** Compressor warranty.
 - **International:** One year parts only.