



Item #

NEW Undercounter REFRIGERATORS & FREEZERS

STANDARD FEATURES

- ⌘ **DURABLE STAINLESS STEEL**
Our undercounters boast a sturdy stainless steel exterior and interior finish. Galvanized back panel provides strength and durability.
- ⌘ **ERGONOMICALLY DESIGNED SOLID DOORS**
Standard doors come with easy grip handles and self closing/120 ° stay open door feature , working together for customer convenience while ABS door liner provides thermal efficiency.
- ⌘ **MAGNETIC DOOR GASKET**
One piece magnetic gasket is removable without tools for ease of cleaning and replacement. Door's in step design gives added protection to the gasket.
- ⌘ **EFFICIENT REFRIGERATION SYSTEM**
Factory engineered oversized and balanced refrigeration system. CFC-free R-134A refrigerators maintain temperature from 33° to 38°F and R-404A Freezers maintain temperature at -8°F. "HC" Freezer models use R-290.
- ⌘ **TEMPERATURE CONTROL**
Analog thermostat for refrigerators and digital for freezers with automatic defrost.
- ⌘ **FRONT BREATHING**
Allows unrestricted placement of the unit.
- ⌘ **HIGH DENSITY POLYURETHANE INSULATION**
Ecomate® CFC-free polyurethane insulation foamed in place for extra strength and energy efficiency. Environmentally friendly with zero ozone depletion potential (ODP) and zero global warming potential (GWP).
- ⌘ **COVERED CORNERS**
Inside the cabinet to meet ETL requirements.
- ⌘ **2 ADJUSTABLE WIRE SHELVES PER DOOR**
Heavy duty, epoxy coated.

- ⌘ EDUR27-B
- ⌘ EDUR48-B
- ⌘ EDUR60-B
- ⌘ EDUF27-HC-B
- ⌘ EDUF48-HC-B
- ⌘ EDUR72-B



EDUR(F)27-B



EDUR48-B

ACCESSORIES

Additional epoxy coated shelves



MODEL	DOORS	CAPACITY (Cu.Ft)	SHLV.S	AMPS	HP	VOLTAGE	NEMA PLUG	CORD LENGTH	CABINET DIMENSIONS			SHIPPING	
									W	D*	H**	Wt.	Cubes
REFRIGERATOR													
EDUR27-B	1	6.1	2	2.7	1/6	115/60/1	5-15P	8'	27"	30"	31"	204	21
EDUR48-B	2	11.8	4	5.4	1/4	115/60/1	5-15P	8'	48"	30"	31"	289	35
EDUR60-B	2	15.0	4	6.7	1/3	115/60/1	5-15P	8'	60"	30"	31"	343	47
EDUR72-B	3	18.2	6	6.7	1/3	115/60/1	5-15P	8'	72"	30"	31"	413	56
FREEZER													
EDUF27-HC-B	1	6.1	2	8.2	3/4	115/60/1	5-15P	8'	27"	30"	31"	214	21
EDUF48-HC-B	2	11.8	4	8.5	3/4	115/60/1	5-15P	8'	48"	30"	31"	319	35

* Depth does not include 1" rear bumper **Height does not include 5" overall for casters




Undercounter


REFRIGERATORS

& FREEZERS


EDUR(F)27-B Top




EDUR(F)48-B Top

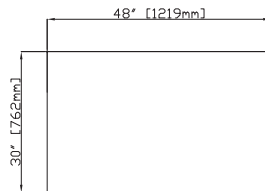


EDUR60 -B Top




EDUR(F)27 -B Front




EDUR(F)48 -B Front




EDUR60-B Front

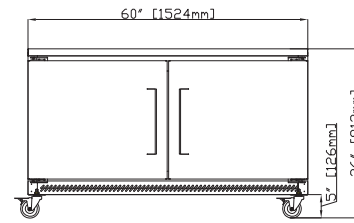


EDUR(F)72-B Top

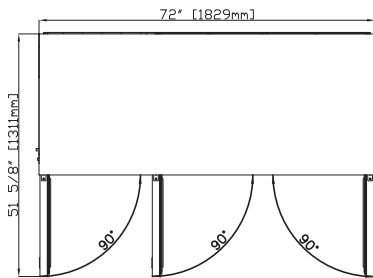

EDUR72 -B Front

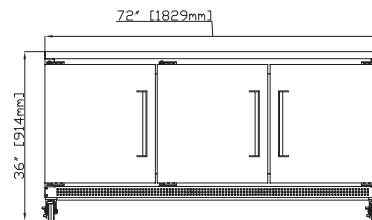

EDUR(F)-B
Common View



* Specifications



④ CABINET CONSTRUCTION

- Sturdy stainless steel exterior and interior finish with a galvanized back panel.
- CABINET & DOOR : Entire foamed-in-place high-density, CFC-free, polyurethane insulation. Covered corner floor to meet ETL requirements.
- CASTERS: 4" Diameter swivel casters, front two with brakes.
- SHELVES: 2 Adjustable heavy duty coated wire shelves per door.

④ DOORS

- Stainless steel exterior with ABS interior liner.
- One piece construction magnetic gasket is removable without tools for easy cleaning.
- CLOSING SYSTEM: Self-closing doors with 120° stay open feature and recessed handles for convenient loading and unloading.

④ REFRIGERATION SYSTEM

- Oversized and balanced refrigeration system.
- Refrigerators maintain temperature from 33° to 38°F and R-404A freezers from -8°F to 0°F. Hot gas evaporator in drain pan for efficient condensate evaporation. "HC" models use R-290.
- Self-contained capillary tube system uses environmentally friendly refrigerant Ecomate® (CFC free).
- Front breathing allows unrestricted placement of the unit.
- Analog thermostat for refrigerators and digital for freezers with automatic defrost.
- Large fan motor and fan blades for better air circulation.
- Self contained system, no plumbing necessary.
- Access for the condensating unit behind the front grill, slides out for easy cleaning and maintenance.

④ ELECTRICAL

- The whole unit is completely pre-wired at factory with cord and plug set included and ready for final connection to a 115/60/1 phase.

④ WARRANTY

- Continental USA & Canada:
- **One year** labor and parts warranty.
 - **Five year** compressor warranty.
 - **International:** one year parts only.