



# Worktops

**NEW**

**REFRIGERATORS  
& FREEZERS**

- ❑ EDWR27-B    ❑ EDWR48-B    ❑ EDWR60-B
- ❑ EDWF27-B    ❑ EDWF48-B    ❑ EDWR72-B

## STANDARD FEATURES

- ⌘ **DURABLE STAINLESS STEEL**  
Our undercounters boast a sturdy stainless steel exterior and interior finish. Galvanized back panel provides strength and durability.
- ⌘ **ERGONOMICALLY DESIGNED SOLID DOORS**  
Standard doors come with easy grip handles and self closing/120 ° stay open door feature , working together for customer convenience while ABS door liner provides thermal efficiency.
- ⌘ **MAGNETIC DOOR GASKET**  
One piece magnetic gasket is removable without tools for ease of cleaning and replacement. Door's in step design gives added protection to the gasket.
- ⌘ **EFFICIENT REFRIGERATION SYSTEM**  
Factory engineered oversized and balanced refrigeration system. CFC-free R-134A refrigerators maintain temperature from 33° to 38°F and R-404A freezers from -8°F to 0°F. Hot gas evaporator in drain pan for efficient condensate evaporation.
- ⌘ **TEMPERATURE CONTROL**  
Analog thermostat for refrigerators and digital for freezers with automatic defrost.
- ⌘ **FRONT BREATHING**  
Allows unrestricted placement of the unit.
- ⌘ **HIGH DENSITY POLYURETHANE INSULATION**  
Ecomate® CFC-free polyurethane insulation foamed in place for extra strength and energy efficiency. Environmentally friendly with zero ozone depletion potential (ODP) and zero global warming potential (GWP).
- ⌘ **COVED CORNERS**  
Inside the cabinet to meet ETL requirements.
- ⌘ **2 ADJUSTABLE WIRE SHELVES PER DOOR**  
Heavy duty, epoxy coated.
- ⌘ **HEAVY DUTY TOP WITH WELDED BACK SPLASH.**



EDWR(F)27-B



EDWR(F)48-B

## ACCESSORIES

Additional epoxy coated shelves



MODEL	DOORS	CAPACITY (Cu.Ft)	SHLVS.	AMPS	HP	VOLTAGE	NEMA PLUG	CORD LENGTH	CABINET DIMENSIONS			SHIPPING	
									W	D*	H**	Wt.	Cubes
<b>REFRIGERATOR</b>													
EDWR27-B	1	6.1	2	2.7	1/6	115/60/1	5-15P	8'	27"	30"	35"	204	21
EDWR48-B	2	11.8	4	5.4	1/4	115/60/1	5-15P	8'	48"	30"	35"	289	35
EDWR60-B	2	15.0	4	6.7	1/3	115/60/1	5-15P	8'	60"	30"	35"	343	47
EDWR72-B	3	18.2	6	6.7	1/3	115/60/1	5-15P	8'	72"	30"	35"	413	56
<b>FREEZER</b>													
EDWF27-B	1	6.1	2	8.2	3/4	115/60/1	5-15P	8'	27"	30"	35"	214	21
EDWF48-B	2	11.8	4	8.5	3/4	115/60/1	5-15P	8'	48"	30"	35"	319	35


\* Depth does not include 1" rear bumper \*\*Height does not include 5" overall for casters




# Work Tops

REFRIGERATORS & FREEZERS


EDWR(F)27-B Top




EDWR(F)48 -B Top

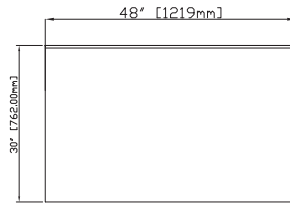


EDWR60-B Top

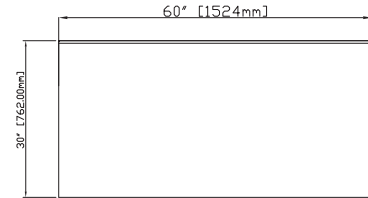


EDWR(F)27-B Front

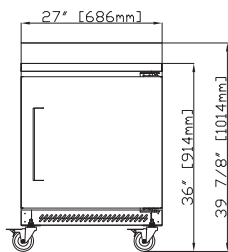


EDWR(F)48-B Front

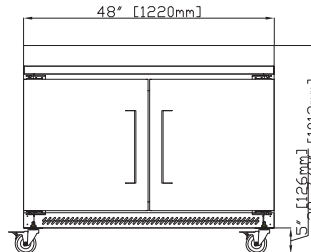


EDWR60-B Front

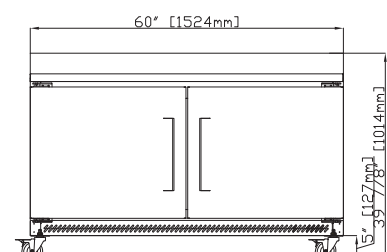


EDWR(F)72-B Top 72" [1829mm]

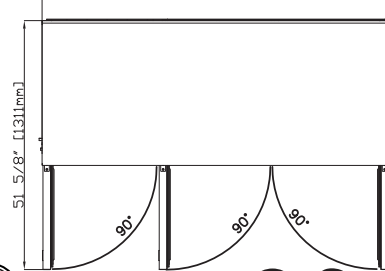


EDWR(F)72-B Front

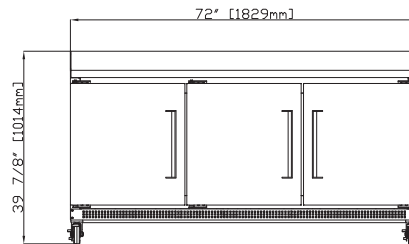

EDWR(F)-B Side  
Common View



## \* Specifications



### ④ CABINET CONSTRUCTION

- Sturdy stainless steel exterior and interior finish with a galvanized back panel.
- Heavy duty top with welded back splash, one piece only.
- CABINET & DOOR : Entire foamed-in-place high-density, CFC-free, polyurethane insulation. Coved corner floor to meet ETL requirements.
- CASTERS: 4" Diameter swivel casters, front two with brakes.
- SHELVES: 2 Adjustable heavy duty coated wire shelves per door

### ④ DOORS

- Stainless steel exterior with ABS interior liner.
- One piece construction magnetic gasket is removable without tools for easy cleaning.
- CLOSING SYSTEM: Self-closing doors with 120° stay open feature and recessed handles for convenient loading and unloading.

### ④ REFRIGERATION SYSTEM

- Oversized and balanced refrigeration system.
- Refrigerators maintain temperature from 33° to 38°F and R-404A freezers from -8°F to 0°F. Hot gas evaporator in drain pan for efficient condensate evaporation.
- Self-contained capillary tube system uses environmentally friendly refrigerant (CFC free)
- Front breathing allows unrestricted placement of the unit.

- Analog thermostat for refrigerators and digital for freezers with automatic defrost.
- Large fan motor and fan blades for better air circulation.
- Self contained system, no plumbing necessary.
- Access for the condensating unit behind the front grill, slides out for easy cleaning and maintenance.

### ④ ELECTRICAL

- The whole unit is completely pre-wired at factory with cord and plug set included and ready for final connection to a 115/60/1 phase.

### ④ WARRANTY

Continental USA & Canada:

- **One year** labor and parts warranty.
- **Five year** compressor warranty.
- **International:** one year parts only.