



# Refrigetated Prep Station

## RTR Series

- ▣ RTR-40
- ▣ RTR-80

## STANDARD FEATURES

### ● DURABLE CONSTRUCTION

Our "RTR" series refrigerated prep station is designed for durability and strength that you will not find in any other products in its class.

### ● HEAVY DUTY EQUIPMENT

All stainless steel interior and exterior construction for a clean and safe food environment. Coved corner floor to meet NSF requirements.

### ● TEMPERATURE CONTROLLER

Digital temperature controller with automatic defrost and temperature display to keep food quality for a longer period of time. Static refrigeration system to keep pans at NSF required temperatures.

### ● HIGH DENSITY POLYURETHANE INSULATION

High density CFC-free polyurethane insulation and balanced CFC-free refrigeration system, R-600a.

### ● EFFICIENT REFRIGERATION SYSTEM

Refrigeration is designed to maintain 34° to 40°F in the pans at all times.

### ● CARBONATE PANS

Units come standard with clear poly carbonate 1/6 size pans. RTR-40 come with (4 ),RTR-80 come with (8).

### ● FEET

Mounted on 4 adjustable feet.




Model	Pans	Volts	Amps	HP	Crated Weight (lbs)	Cabinet Dimensions		
						W	D	H
<b>REFRIGERATED PREP STATION</b>								
RTR-40	4	115	1.4	1/6	50.7	15"	25.8"	8.5"
RTR-80	8	115	1.4	1/6	61.7	27.5"	25.8"	8.5"



# Refrigerated Prep Station

## RTR Series

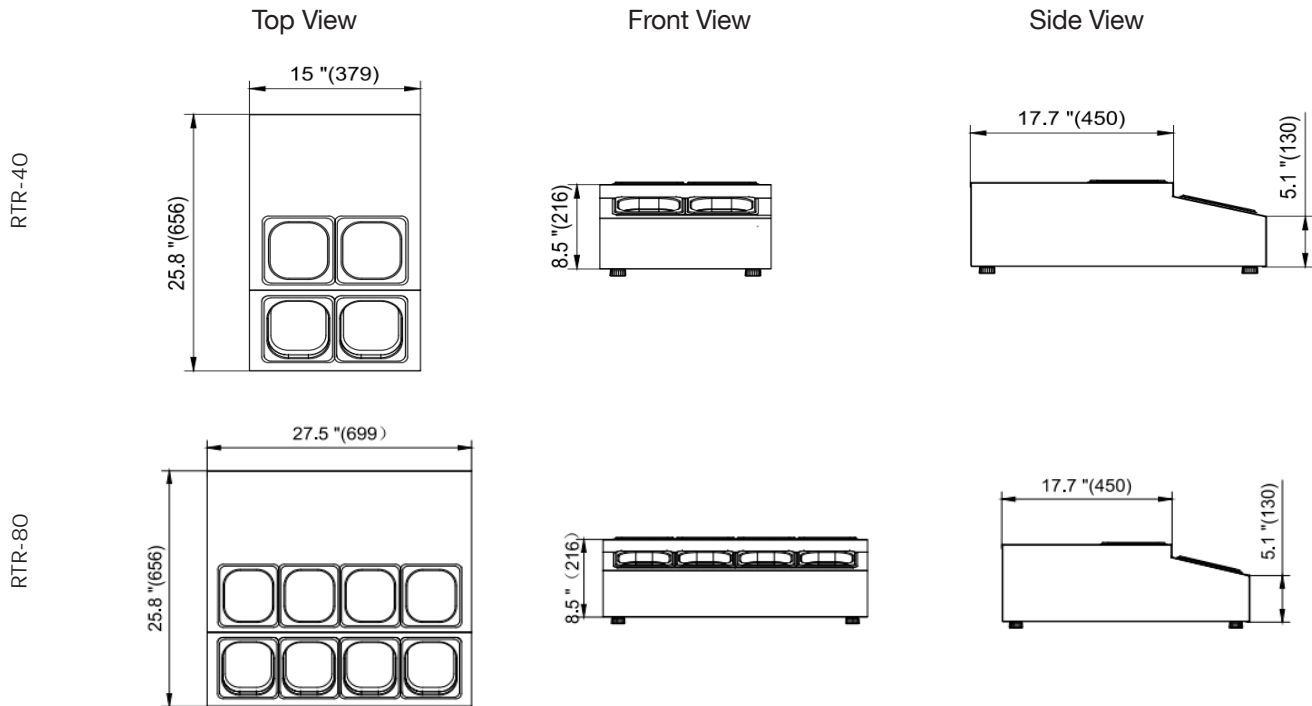

## \* Specifications



### ■ CONSTRUCTION

- Heavy duty stainless steel exterior front, sides and back. Interior completely constructed of heavy duty stainless steel with right-angle floor.
- Unit comes complete with a 2" CFC-Free polyurethane insulation, foamed in place.

### ■ REFRIGERATION SYSTEM

- Self-contained capillary tube system using environmentally friendly (CFC Free) refrigerant. (R-600a) Bottom mount condensing unit and static cold wall coils are located on the bottom.
- Refrigerator is designed to maintain temperatures between 34° F to 40° F during normal operations at an ambient temperature of 89.6° F.
- Energy savings digital controllers and thermostats. Automatic defrost, time initiated.

### ■ PANS

- RTR-40 comes with (4) clear poly carbonate 1/6 size pans, 2 pieces 4" deep and 2 pieces 6" deep.
- RTR-80 comes with (8) clear poly carbonate 1/6 size pans, 4 pieces 4" deep and 4 pieces 6" deep.

### ■ OTHERS

- Unit is supplied standard with a 8' cord and plug (Nema 5-15p). Standard with adjustable feet.

### ■ WARRANTY

Continental USA:

- **One year:** Labor and parts warranty.
- **Five year:** Compressor warranty.